



Updating The Drivesmart Sentinel

1. Go to the www.drivesmartpro.com website using your browser.

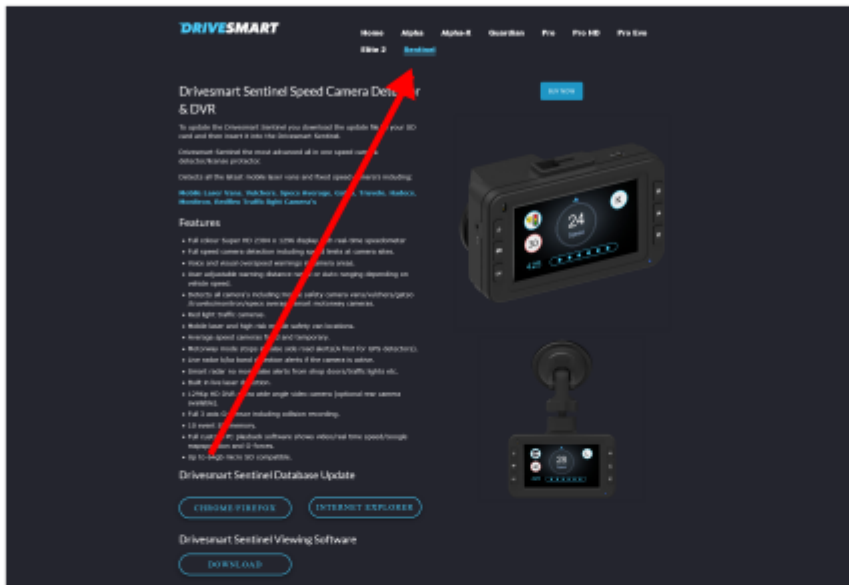

2. IMPORTANT ! Go to the Sentinel tab along the top of the webpage. Choosing the incorrect download may stop your device from working.

3. At the bottom of the page you have two download options. Pick the option that corresponds to the web browser you are using.

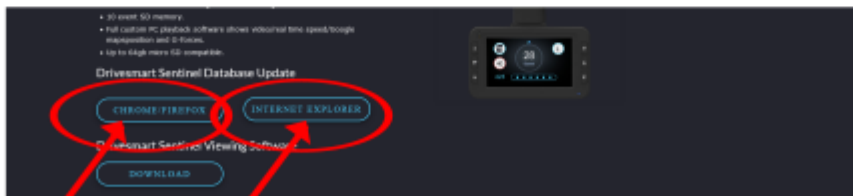


3. When the download appears at the bottom of the screen, click the small UP ARROW to bring up the option to 'SHOW IN FOLDER'. The FILE EXPLORER window should then show you a .BIN file in your DOWNLOADS folder. Now - If you are using the CHROME / FIREFOX download, jump to STEP 11.




4. If you are using INTERNET EXPLORER, you may have a slightly different download which comes as a .ZIP FILE - the bar will ask you to OPEN / SAVE / CANCEL. You need to click the SAVE option and then the OPEN IN FOLDER option.




5. When the folder has been saved, you have the option to view where it is located. Click OPEN FOLDER.

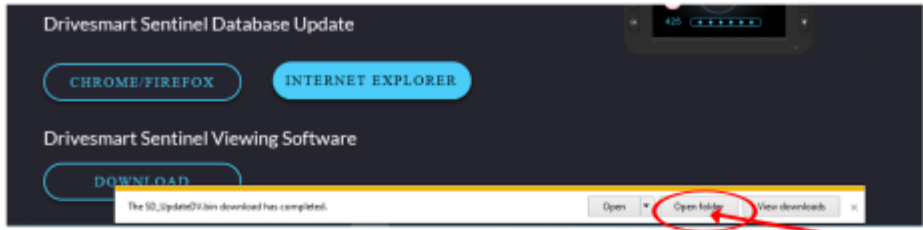

6. This will take you into your FILE EXPLORER where you should be able to see where your ZIP file is now located. This will need EXTRACTING before we can upload it your MICRO SD CARD.

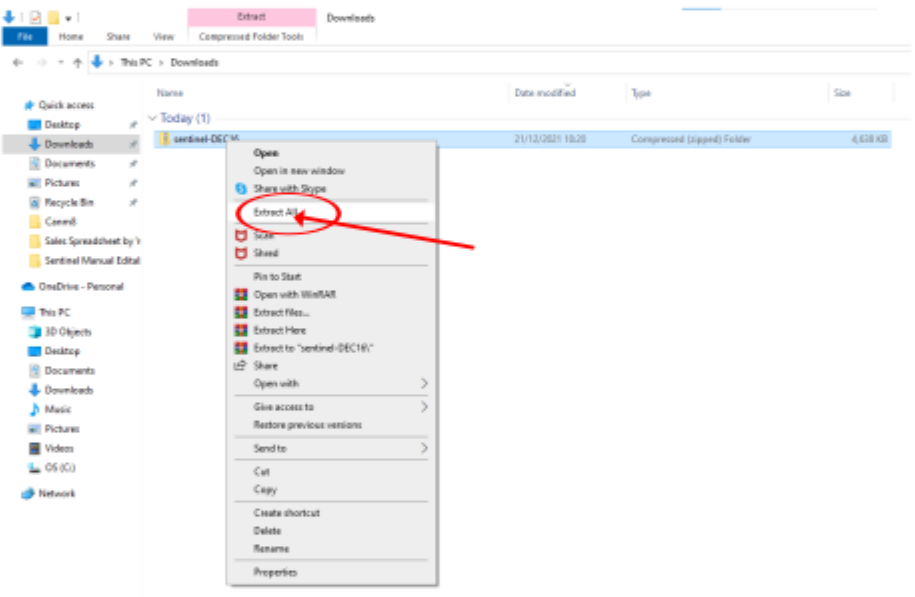

7. To EXTRACT the files, you must RIGHT CLICK the ZIP file, and scroll to the option 'EXTRACT ALL.'

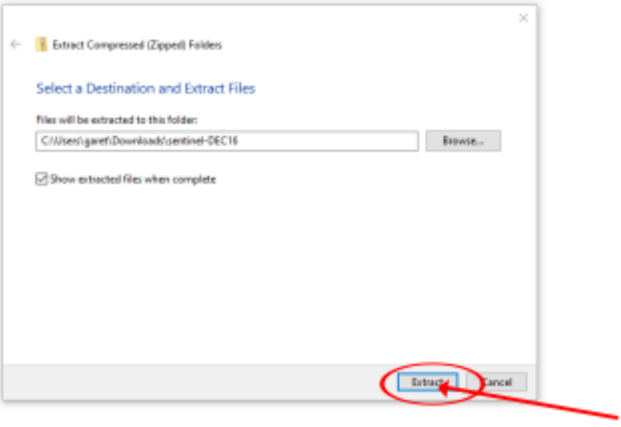

7. To EXTRACT the files, you must RIGHT CLICK the ZIP file, and scroll to the option 'EXTRACT ALL.'

8. *****IMPORTANT!***** This file must always be labelled 'SD_UpdateDV.bin' in order to work. If your file has a number in the file name (i.e. 'SD_UpdateDV(2).bin') then you need to edit it accordingly either before or after you have transferred it on to your MICRO SD CARD.


9. We need to now put it on to our ELITE 2 MICRO SD CARD. Start by removing your MICRO SD CARD from your ELITE 2 UNIT.

10. Insert your MICRO SD CARD into your computer using a suitable card slot / card reader.




11. Next, we need to open up the FILE EXPLORER on the computer and locate that .BIN file we have just recently downloaded. (Most likely in your DOWNLOADS).


12. We then need to RIGHT CLICK on the .BIN file and scroll to 'CUT'

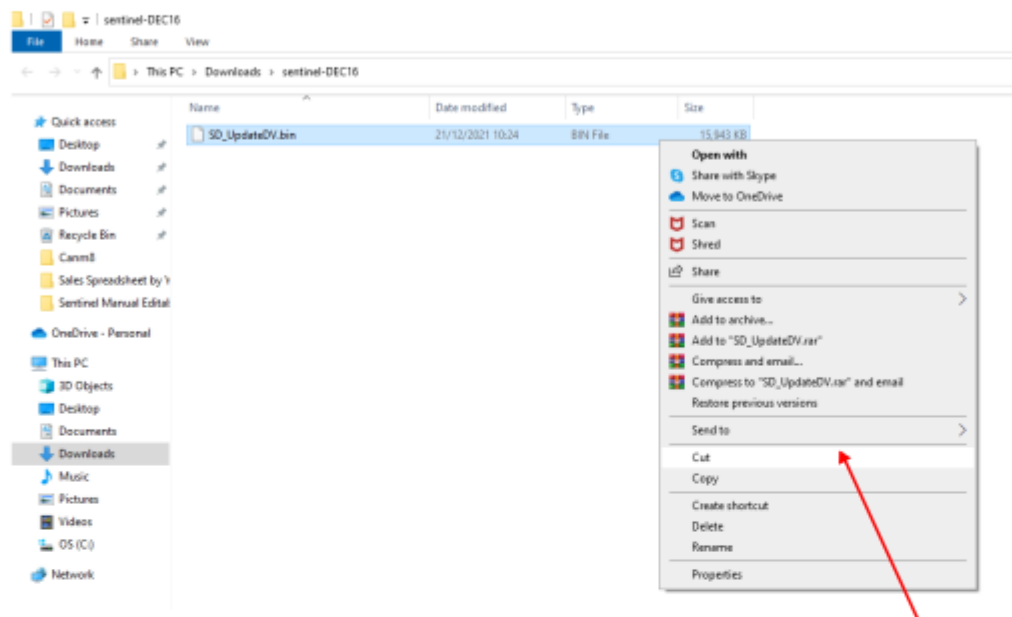


13. Next, while still in the FILE EXPLORER window, we need to locate our MICRO SD CARD main folder which we have just inserted. (You should see it down the left-hand side). Ours is shown as the E: DRIVE, yours may be different.

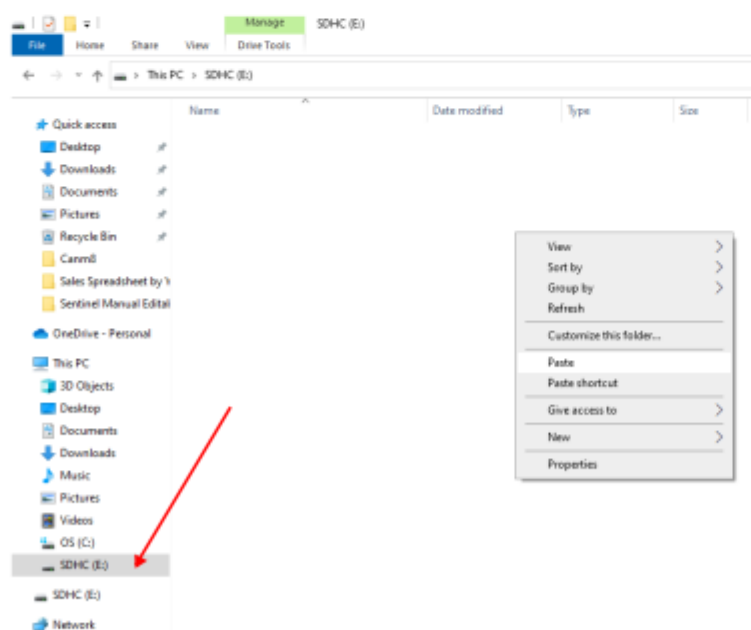


14. When you find your MICRO SD CARD main folder, open it and simply RIGHT CLICK in the white space to bring up the option to 'PASTE'. Select this to paste the .BIN file on to your MICRO SD CARD.

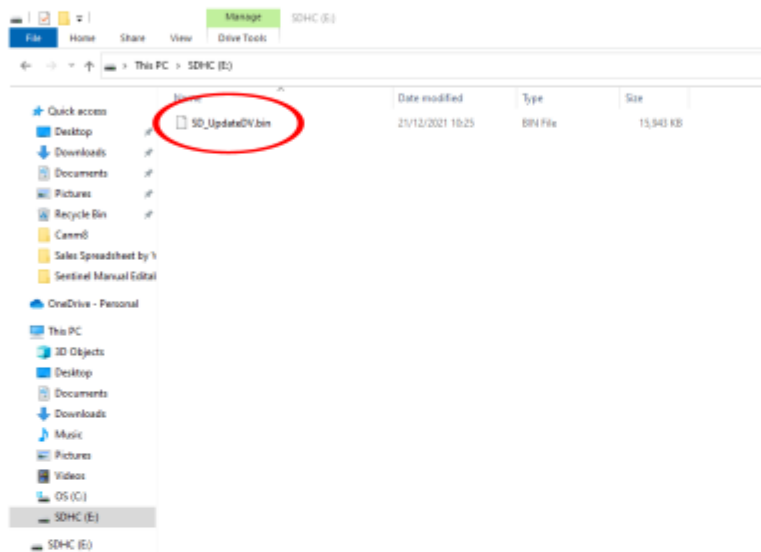

15. That's now all done. We now just need to safely remove the MICRO SD CARD from our computer. RIGHT CLICK on the MICRO SD CARD main folder and scroll to the option 'EJECT'.

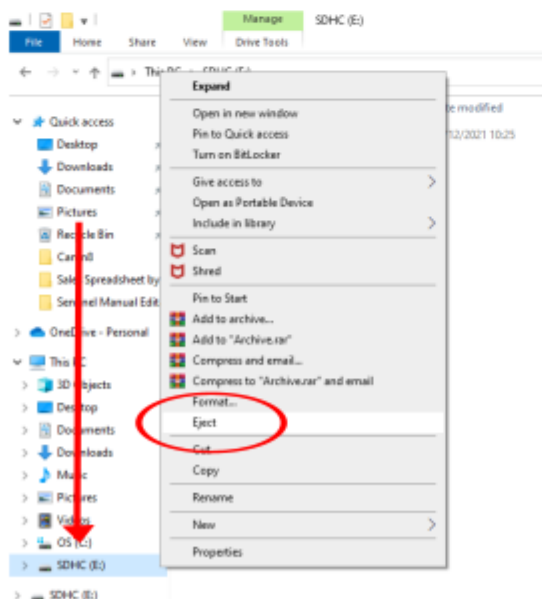



16. You can then remove your MICRO SD CARD from your computer.

17. Place the MICRO SD CARD back into your Drivesmart Elite 2 and then power up the unit.

18. The unit will start to initialise and the new database and firmware will load, indicated by loading bars on the screen. When completed, the unit may need to be restarted.

